



GE
Lighting

10261 - GE Cool White T12

F24T12/CW/HO

GENERAL CHARACTERISTICS

Base Description	Recessed Double Contact
Base Type	Pin/Plug-In
Mercury Content	60 mg
Mercury-Picogram per mean lm hr	4956.6
Starting Temp (MIN) C-degrees	-29 °C
Bulb Material	Soda lime
Rated Life Hours-nominal	9000 h
Primary Application	Full Wattage
Product Technology	Linear Fluorescent
Base	R17d
Bulb Shape	T12

PHOTOMETRIC CHARACTERISTICS

Mean Lumens nominal	1345 lm
Nominal Initial Lumen per Watt	46
Initial Lumens-nominal	1620 lm
Color Rendering Index-CRI	60
Color Temperature	4100 K

PRODUCT INFORMATION

Product Code	10261
Description	F24T12/CW/HO
Alternative Unit Of Measure	Case
Standard Package Quantity	24
Ean UPC	043168102612
Standard Package GTIN	10043168102619
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	24
Sales Unit	Unit
UCC	043168102612

DIMENSIONS

Bulb Diameter (DIA) <Max>	1.59 in
Bulb Diameter (DIA) <Min>	1.41 in
Diameter	1.5 in
End of Base Pin to Pin	21.72 in
Nominal Length	24 in

ELECTRICAL CHARACTERISTICS

Current Crest Factor (MAX)	1.7
Open Circuit Voltage (rapid start) Min @ Temperature	145.00 V @ 10 °C
225.00 V @ -29 °C	Cathode Resistance Ratio - Rh/Rc (MIN)
4.250	Cathode Resistance Ratio - Rh/Rc (MAX)
6.500	Rated power (Watts)



CAUTIONS & WARNINGS


Caution

- Lamp may shatter and cause injury if broken
- Wear safety glasses and gloves when handling lamp.
- Do not use excessive force when installing lamp.

Warning

- Risk of Electric Shock
- Turn power off before inspection installation or removal.



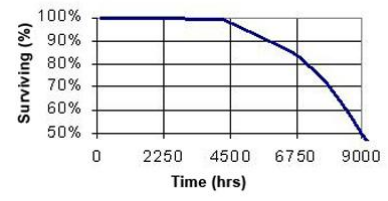

Oct 1, 2015 11:48:34 AM For additional information, visit www.gelighting.com