



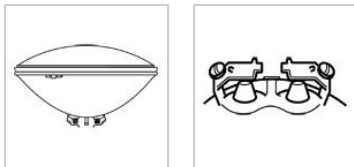

GE
Lighting

23863 - Q20A/PAR56/3

GE Quartzline® PAR56 - Airport & Airfield

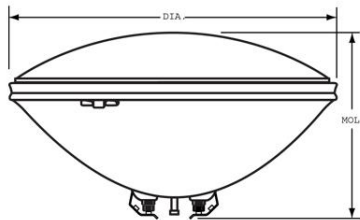

GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR56
Base	Screw Terminals
Filament	CC-6
Rated Life (NOM)	500.0 h
Primary Application	Airport & Airfield

PHOTOMETRIC CHARACTERISTICS

Center Beam Candlepower (CBCP) (NOM)	330000.0
--------------------------------------	----------

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	499.0
Burn Position	Base down to horizontal

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	4.500 in(114.3 mm)
Bulb Diameter (DIA) (NOM)	7.000 in(177.8 mm)

PRODUCT INFORMATION

Product Code	23863
Description	Q20A/PAR56/3
Standard Package	Case
Standard Package GTIN	10043168238639
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168238632

CAUTIONS & WARNINGS

Caution

- Risk of Burn
 - Allow lamp/fixture to cool before handling.
- Lamp may shatter and cause injury if broken
 - Do not use lamp if outer glass is scratched or broken.

Warning

- Lamp emits UV radiation which may cause eye/skin irritation.
 - Avoid exposure of eyes and skin to unshielded lamp.
- Risk of Fire
 - Keep combustible materials away from lamp.
 - Use in enclosed fixture rated for this product.
- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
 - Avoid direct water/liquid contact.
 - Use in enclosed fixture rated for this product.
 - Operate lamp only in specified position.
 - Do not use lamp if outer glass is scratched or broken.
 - Do not exceed 110% of rated voltage.