

LED Post-Top HID Replacement Lamps



25/40
watts

2600/
4200
lumens

105
lpw

4000K
CCT

features

- LED alternative for existing HID fixtures
- Replaces up to 175 watt HID lamps
- Uses up to 70% less energy and lasts 3x – 5x longer than most HID systems
- Operates directly on 120v – 277v, no ballast required
- Superior optical control directs light uniformly over wide area
- Simple installation with standard medium and mogul bases
- Instant 100% brightness when turned on
- Enclosed fixture approved (55C/131F)

RoHS
Compliant



performance


- 2600 lumens @ 25W
- 4200 lumens @ 40W
- 4000K +/- 250K
- 105 lpw
- 65 CRI
- 50,000 hour life
- Non-dimmable
- UL listed for damp locations
- Operates in -40°C to 55°C (-40°F to 131°F) environment temperature
- Must operate in base-down burn position
- Universal voltage operation from 120vac thru 277vac
- Typically replaces 50W to 175W HID
- Surge Protection: 4,000 volts

applications


- Streetscapes
- University Campuses
- Community Parks & Recreation Facilities
- Apartment Complexes
- Municipalities
- Bike Paths

LED Post-Top HID Replacement Lamps

dimensions

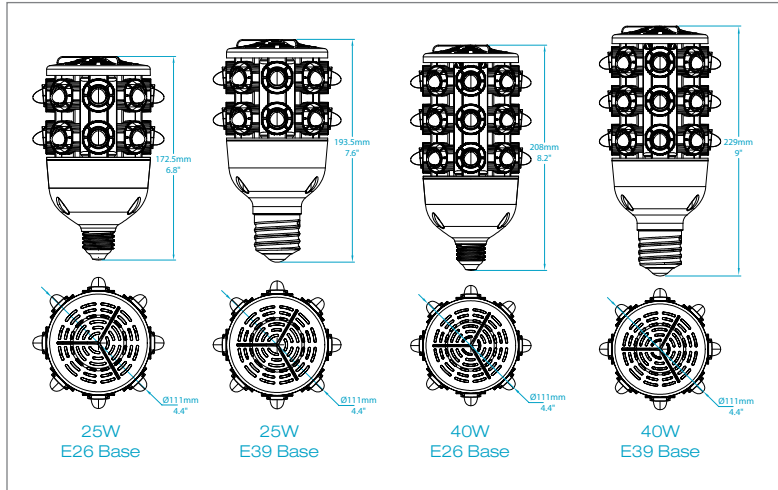

photometrics

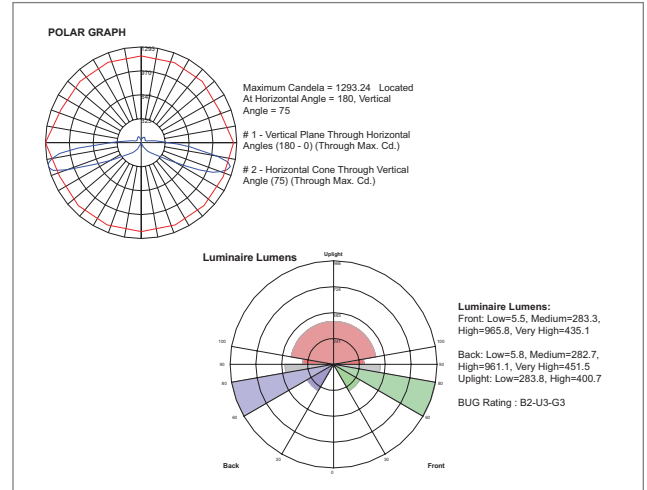

ordering information

Order Code	Litespan Part #	Watts	Volts	Lumens	CCT	CRI	MOL	Base	Life Hours	
08847	C0820-PT-25W-23K-N61-E26-DN-W	25W	120-277 VAC	1,880 +/-200	2300K	70+	6.79"	E26	50,000	✖
08752	C0820-PT-25W-40K-N61-E26-DN-W	25W	120-277 VAC	2,700 +/-200	4000K	70+	6.79"	E26	50,000	✖
08753	C0820-PT-25W-40K-N61-E39-DN-W	25W	120-277 VAC	2,700 +/-200	4000K	70+	7.62"	E39	50,000	✖
08754	C0820-PT-40W-40K-N61-E26-DN-W	40W	120-277 VAC	4,200 +/- 200	4000K	70+	8.19"	E26	50,000	✖
08755	C0820-PT-40W-40K-N61-E39-DN-W	40W	120-277 VAC	4,200 +/- 200	4000K	70+	9.02"	E39	50,000	✖
93243	C0820-PT-30W-27K-W**	30W	120-277 VAC	2,730 +/-200	2700K	70+	8.75"	E39	50,000	
93244	C0820-PT-30W-30K-W**	30W	120-277 VAC	2,775 +/-200	3000K	70+	8.75"	E39	50,000	
93246	C0820-PT-30W-50K-W**	30W	120-277 VAC	3,150 +/-200	5000K	70+	8.75"	E39	50,000	
08105	C0820-PT-45W-23K-N61-W-N-U**	45W	120-277 VAC	4,000 +/-200	2300K	70+	11.00"	E39	50,000	
93250	C0820-PT-45W-50K-W**	45W	120-277 VAC	4,725 +/-200	5000K	70+	11.00"	E39	50,000	

**While supplies last

✖ Lighting Design Lab Qualified

watch > like > follow



selection. solutions. simplicity. eiko.com

23220 W. 84th St, Shawnee, KS 66227 · (P) 1.800.852.2217 (F) 1.800.492.8975
Canada: 81 King St, Barrie, ON L4N 6B5 · (P) 1.888.410.8151 (F) 1.888.705.1335