




GE
Lighting

13002 - F60T10/CW 6PK

GE garage & basement 135 watt T10 1-pack

- The T10 is designed to be used in cold temperature applications from 10 degrees F to 40 degrees F.
- 4100K cool white light appearance
- Cool white light perfect for sizable spaces
- For use in large spaces such as basements and garages
- GE garage & basement fluorescent bulbs' cool white light is perfect for illuminating sizable spaces throughout your home. Use in large open spaces in your home including finished and unfinished basements, garages and rec rooms
- 1.3 inch diameter T10 with recessed double contact (r17d) base
- 60 inches long
- Lasts 2.7 years based on 6 hours per day usage

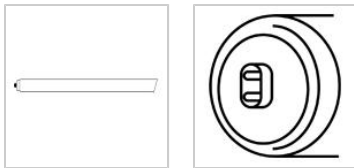

CAUTIONS & WARNINGS

Caution


- Lamp may shatter and cause injury if broken
 - Wear safety glasses and gloves when handling lamp.
 - Do not use excessive force when installing lamp.

Warning

- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.

GRAPHS & CHARTS

Graphs_Lamp Mortality

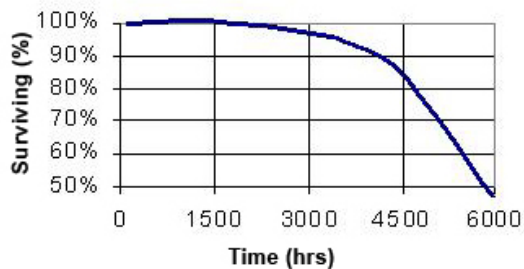

Graphs_Temperature Curve

GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight Linear
Bulb	T10
Base	Recessed Double Contact (R17d)
Rated Life (NOM)	6000.0 h
Rated Life (instant start) @ Time	6000 h @ 3 h
Bulb Material	Soda lime
Mercury Content (NOM)	90.0 mg
Picograms of Mercury (NOM)	2142.9 pg
Primary Application	Cold Temperature;Speciality

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	7000.0
Nominal Initial Lumens per Watt (NOM)	51.85185
Color Temperature (NOM)	4100.0 K
Color Rendering Index (CRI) (NOM)	60.0

ELECTRICAL CHARACTERISTICS


Wattage (NOM)	135.0
Cathode Resistance Ratio - Rh/ Rc (MAX)	6.5
Preheat Voltage (MIN)	4.25 V

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	60.000 in(1524.0 mm)
Nominal Length (NOM)	60.000 in(1524.0 mm)
Bulb Diameter (DIA) (MAX)	1.340 in(34.0 mm)
Bulb Diameter (DIA) (NOM)	1.250 in(31.8 mm)

PRODUCT INFORMATION

Product Code	13002
Description	F60T10/CW 6PK
Standard Package	Case
Standard Package GTIN	10043168130025
Standard Package Quantity	6
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	6
UPC	043168130028

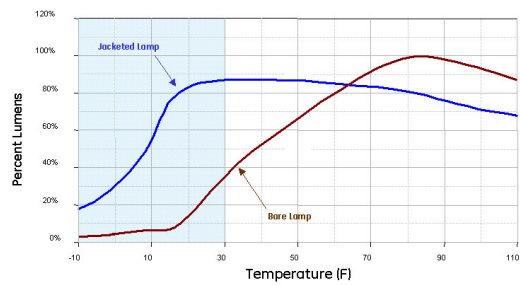

NOTES

- Because Power Groove® and Very High Output lamps are most used in commercial applications, the life rating is based on 12 hrs. per start.